




## L-572 SS , L-572 SBN Magnetic Mortise Lock

Material of latch & bolt: zinc alloy  
 Material of forend: 201 Stainless Steel  
 Backset: 55mm  
 Center distance: 72mm


Finishes: ● Satin Nickel  
 ● Satin Black Nickel

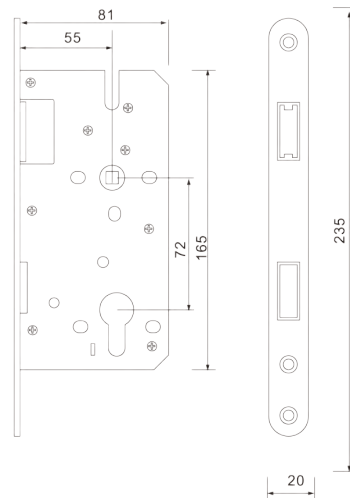

## L-116 PC , L-117 SBN 70mm single open cylinder

Materials: Zinc Cover Brass, Brass  
 Function: Entry, Privacy  
 Doors: Wooden Doors, Metal Doors  
 Standard Fittings: A Cylinder, 4 keys, Cylinder Screws

Finishes: ● Satin Nickel ● Matt Black

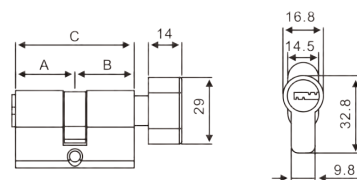

(C=70mm, A=B=35mm)


# CYLINDERS & LOCK CASES




**L - 242NS** ขนาด  
 ไม้กุญแจข้างเดียว 60 mm  
 (อีกข้างปิดล็อก) 70 mm



**L - 241/1NS** ขนาด  
 ไม้กุญแจสองข้าง 60 mm  
 70 mm

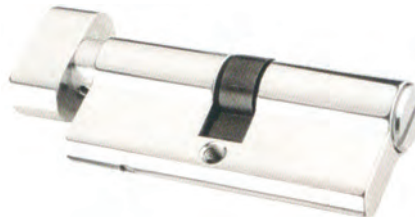

**L - 242/2NS** ขนาด  
 ไม้กุญแจห้องน้ำ 60 mm  
 70 mm

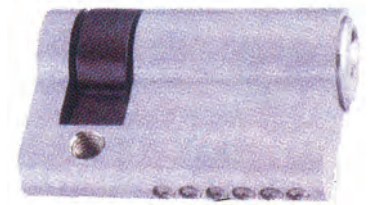


**L - 241NS** ขนาด  
 ไม้กุญแจทางเดียว 40 mm  
 (อีกข้างปิดตัน)



**L - 250 SS**  
 ตลับกุญแจบานเลื่อน  
 สแตนเลส  
 ขนาด  
 30x46x100 mm  
 50x66x100 mm




**L - 240 NS**  
 ตลับกุญแจลิ้นตาย  
 ขนาด  
 45x70x90 mm

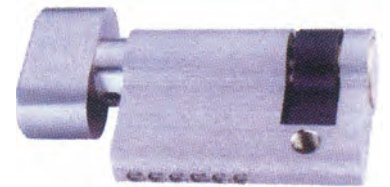

**L - 248 NS**  
 ปิดล็อกทางเดียว (อีกด้านปิดตัน)  
 ขนาด 40 mm



**L - 243**  
 ตลับกุญแจ  
 ขนาด  
 50x85 mm



**L - 341**  
 ตลับกุญแจทางผ่าน  
 ขนาด  
 45x73x103 mm



**L - 349**  
 ตลับกุญแจห้องน้ำ



**L - 289**  
 กุญแจล็อกเฟรมอลูมิเนียม  
 แบบบานเปิด (บานสวิง)  
 สี : อลูมิเนียม, ซา  
 อบขาว, ดำ



**L - 291**  
 กุญแจล็อกเฟรมอลูมิเนียม  
 แบบบานเลื่อน  
 สี : อลูมิเนียม, ซา  
 อบขาว, ดำ



**L - 350** ที่ปิดห้องน้ำ ว่าง - ไม่ว่าง

# INVISIBLE ELECTRONIC DOOR LOCK


## L-509



### FUNCTION :



Install the handle on the inner door.

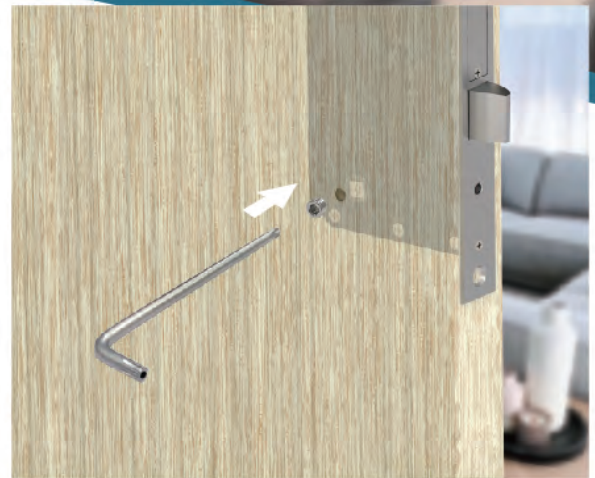


The special tool provided for emergency open use.

## SMART DIGITAL INVISIBLE DOOR LOCK

# L-509

### Feature :

1. Easy to program.
2. Not require physical key.
3. Reliable for door thickness 30mm - 50mm.
4. Emergency opening feature.
5. Auto / manual close mode available.
6. Open / closed status via LED signal.

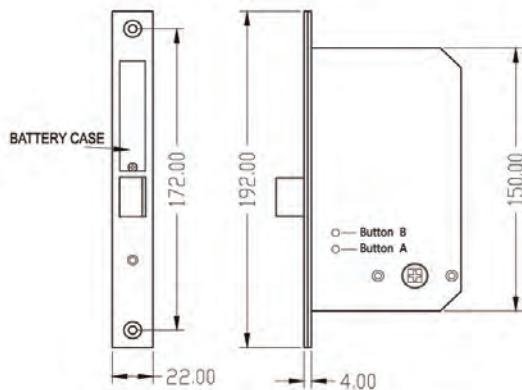

**Material :** Stainless steel and ABS.

**Power supply :** 3 standard AAA alkaline batteries.

### Function card :

1. MANAGEMENT(PROGRAMMING) CARD – is used to create user card
2. User card is the key of the lock

The same RF card can be shared by all the lock

- Open/close cycle: 20,000 times
- Mode: Auto-lock, manual-lock & public mode
- Temperature range: 0~60°C
- Door pusher (Optional)
- Star shape allen key (for emergency open use only)

