


HINGE SYSTEM

บานพับ

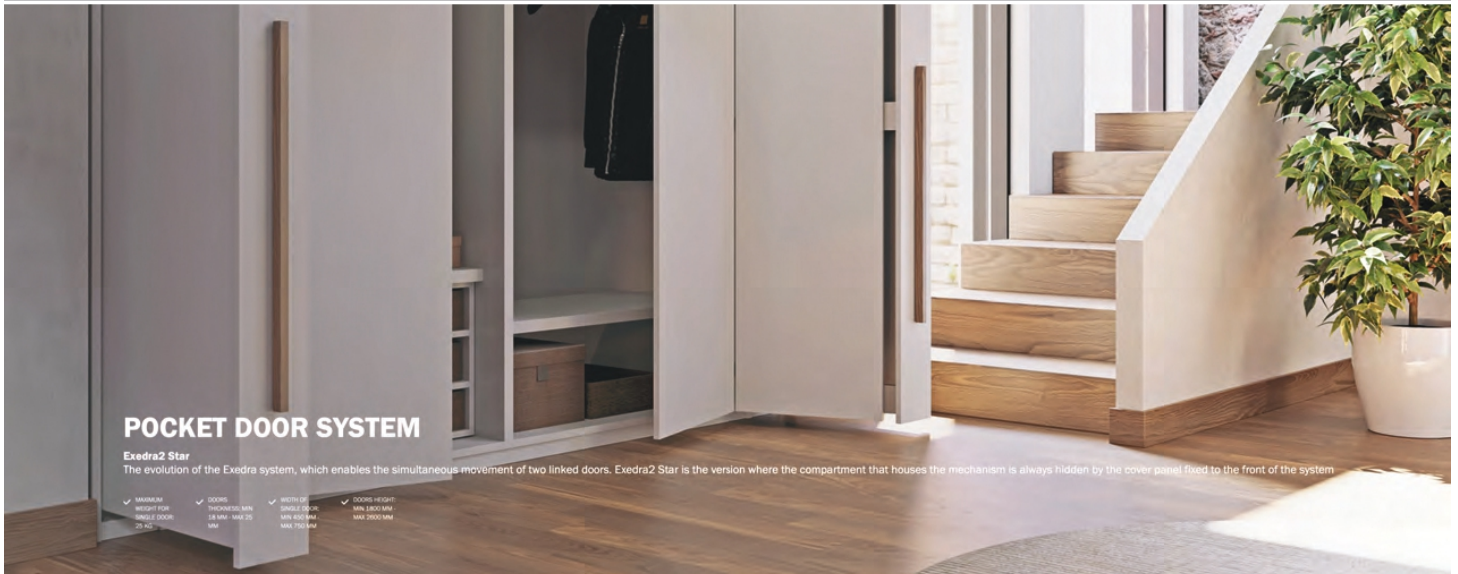

POCKET DOOR SYSTEM

Exedra2 Star

The evolution of the Exedra system, which enables the simultaneous movement of two linked doors. Exedra2 Star is the version where the compartment that houses the mechanism is always hidden by the cover panel fixed to the front of the system

- ✓ MINIMUM WEIGHT FOR SINGLE DOOR: 25 Kg
- ✓ DOORS THICKNESS: MIN 18 MM - MAX 25 MM
- ✓ WIDTH OF SINGLE DOOR: MIN 450 MM - MAX 750 MM
- ✓ DOORS HEIGHT: MIN 1800 MM - MAX 2600 MM


Exedra2 Star Technical Information

DOUBLE pocket door system with cam-assisted door extraction and cushioned door insertion.
Door characteristics:

Adjustment:

- vertical adjustment ± 5 mm
- horizontal adjustment ± 3.5 mm
- front adjustment: - upper ± 3 mm
- lower ± 2 mm
- Maximum weight for single door: 25 Kg
- Doors thickness: min 18 mm - max 25 mm
- Width of single door -
Exedra2 Star: min 450 mm - max 750 mm
- Doors height: min 1800 mm - max 2600 mm

Exedra2 Star

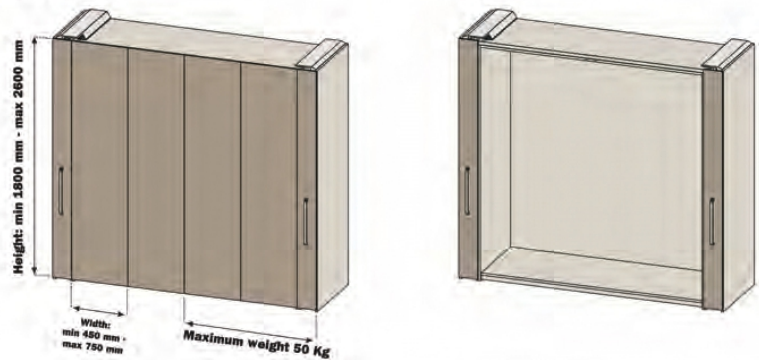

- 1 - Unique patented door opening system. The exterior surfaces of the doors are always protected during the opening and closing cycle.
- 2 - New loadbearing track on the top of the cabinet.
- 3 - Magnetic buffer for assisted cushioned doors insertion.
- 4 - Structural aluminum frame for doors movement.
- 5 - Frontal insertion of the loadbearing frame facilitating its installation in a wall recess.
- 6 - Side frame to support the lower loadbearing track. All of its load is carried by the side panel. The track does not require ground support.
- 7 - Anti-crash device.

